



USB2.0 Connection

A-B, male/male, grey


| Art.-Nr. | Type | Length |
|---------------------|--------------------------------|--------|
| ELM201001020 | Plug Series A to Plug Series B | 2 m |
| ELM201001030 | Plug Series A to Plug Series B | 3 m |
| ELM201001050 | Plug Series A to Plug Series B | 5 m |

- Moulded
- Shielded
- Assembly conforms to USB2.0 specification
- Colour grey



RoHS
compliant


ECOLAN[®]

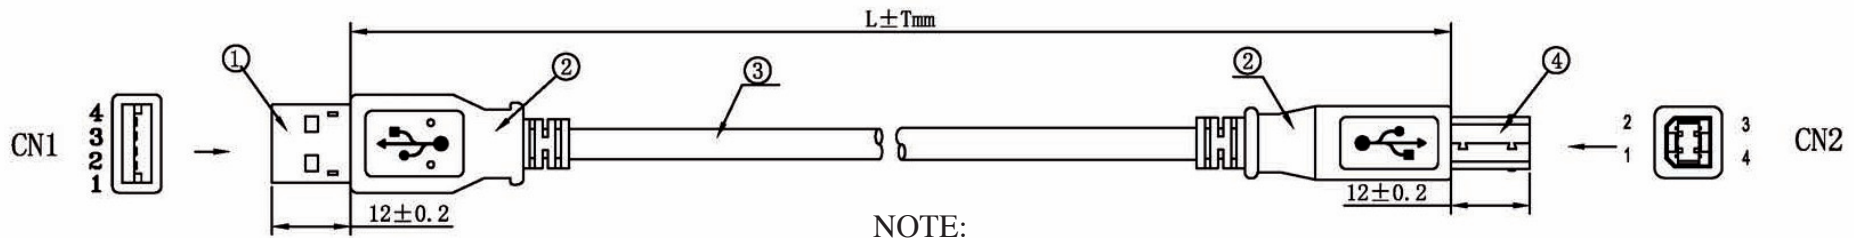

NOTE:

- 1.PRINTING: ECOLAN USB2.0 HIGH SPEED CABLE AWG28*1P* AWG24*2C AWM 80°C 30V VW-1
- 2.ROHS compliant
- 3.Operating Temperature: -15°C -80°C

PIN OUT


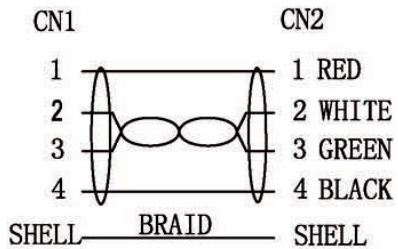


Specification

| NO. | MATERIAL | DESCRIPTION | Q'TY |
|-----|-----------|---|-------|
| 1 | CONNECTOR | USB A, TYPE MALE, NICKEL PLATED SHELL 1µ GOLD PLATED PIN, WHITE INSULATOR | 1 Set |
| 2 | OVERMOULD | PVC Colour: GREY | 20g |
| 3 | CABLE | 28AWG*1P+24AWG*2C+AL+B(COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET:PVC/GREY OD: 4.5±0.1mm | 1 |
| 4 | CONNECTOR | USB B, TYPE MALE, NICKEL PLATED SHELL 1µ GOLD PLATED PIN, WHITE INSULATOR | 1 Set |


| ITEM NO. | LENGTH | EAN.CODE | ECOLAN ZIP-BAG |
|--------------|-----------|---------------|----------------|
| ELM201001020 | 2000±20mm | 4049759001421 | 183mm*232mm |
| ELM201001030 | 3000±30mm | 4049759001438 | 183mm*232mm |
| ELM201001050 | 5000±50mm | 4049759001445 | 183mm*232mm |

Poly Bag

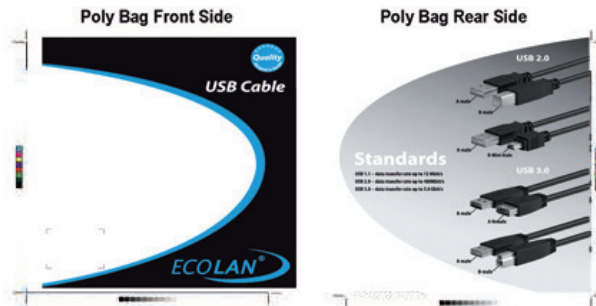

UP
The plugs of the cable have to show to upper side of the Poly bag!!!

Label

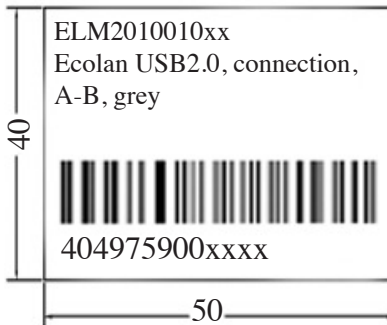

RoHS compliant

| | | | |
|-----------------------|---------------|---|--|
| Created BT | Date 01.04.10 | ECOLAN USB2.0 connection A-B, grey | |
| Last rev. BT | Date 01.04.10 | | |
| ITEM NO: ELM2010010xx | | | |