



USB3.0 Extension


A-A, male/female

| Art.-Nr. | Type | Length |
|---------------------|------------------------|--------|
| ELM201007020 | USB3.0 extension cable | 2 m |
| ELM201007030 | USB3.0 extension cable | 3 m |

- Moulded
- Shielded
- For data transmission rates up to 5 GBit/s
- Assembly conform to USB3.0 specification
- Colour black



RoHS
compliant

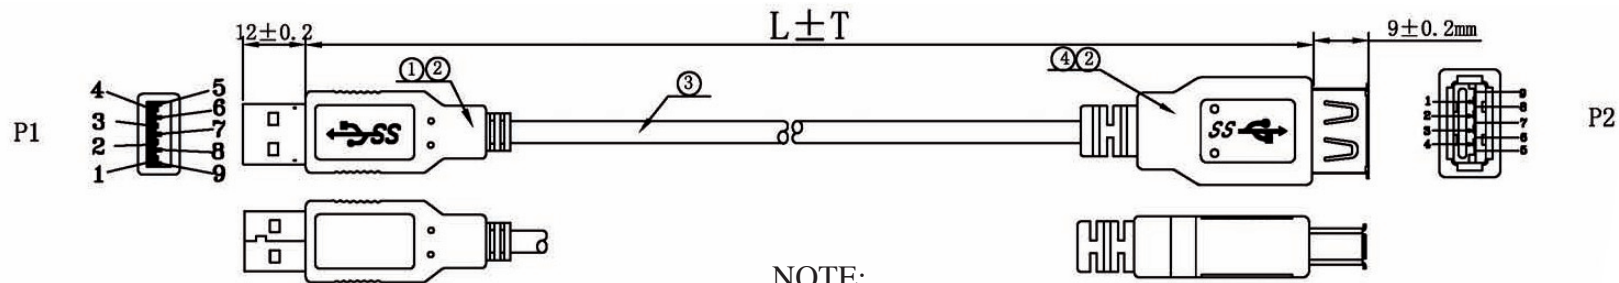

NOTE:

- 1.PRINTING: ECOLAN USB3.0 Super Speed Cable AWG 28*1P AWG28*2C AWM 80°C 30V VW-1
- 2.ROHS compliant
- 3.Operating Temperature: -15°C -80°C

PIN OUT



| P1 | | P2 |
|----|-------------|----|
| 1 | RED | 1 |
| 2 | WHITE | 2 |
| 3 | GREEN | 3 |
| 4 | BLACK | 4 |
| 5 | YELLOW | 5 |
| 6 | BLUE | 6 |
| 7 | DRAIN | 7 |
| 8 | DRAIN | 8 |
| 9 | ORANGE | 9 |
| | PURPLE | |
| | BRAID+DRAIN | |
| | SHELL | |

Specification

| NO. | MATERIAL | DESCRIPTION | Q'TY |
|-----|-----------|--|-------|
| 1 | CONNECTOR | USB 3.0 A/M TYPE, NICKEL PLATED SHELL, GOLD PLATED PIN, BLUE INSULATOR | 1 Set |
| 2 | OVERMOULD | PVC COLOUR: BLACK | 20g |
| 3 | CABLE | USB 3.0 28AWG(7/0.127TC*1P+E+WAM) *2+7/0.127TC*1P+7/0.127TC*2C+AEB B=AL -MG E=7/0.127TC JACKET:PVC/BLUE(BL06) OD:. 5.3±0.2mm | 1 |
| 4 | CONNECTOR | USB3.0 A/F TYPE, NICKEL PLATED SHELL, GOLD PLATED PIN, BLUE INSULATOR | 1 Set |


| ITEM NO. | LENGTH | EAN.CODE | ECOLAN ZIP-BAG |
|--------------|-----------|---------------|----------------|
| ELM201007020 | 1800±18mm | 4049759008581 | 183mm*232mm |
| ELM201007030 | 3000±30mm | 4049759008598 | 183mm*232mm |

Poly Bag

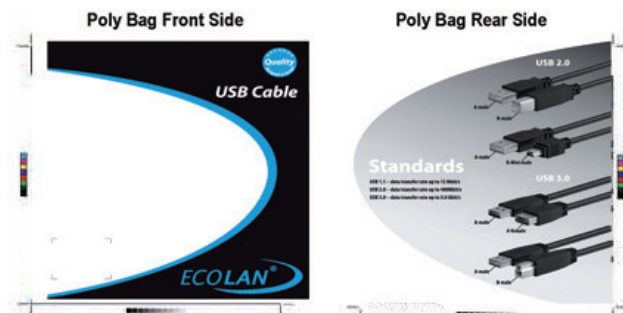

UP
The plugs of the cable have to show to upper side of the Poly bag!!!

Label

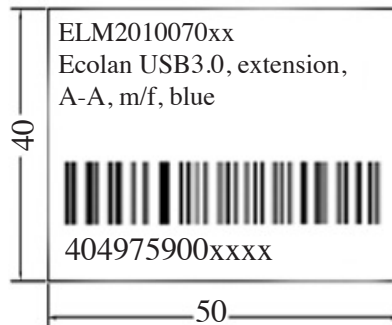

RoHS compliant

| | | | |
|-----------------------|---------------|--|--|
| Created BT | Date 01.04.10 | ECOLAN USB3.0 extension A-A,m/f, blue | |
| Last rev. BT | Date 01.04.10 | | |
| ITEM NO: ELM2010070xx | | | |