



eSATA Connection


2 x eSATA male, 300 MByte/s

Art.-Nr.	Type	Length
ELM208006005	two 7-pole eSATA plugs	0.5
ELM208006010	two 7-pole eSATA plugs	1.0
ELM208006020	two 7-pole eSATA plugs	2.0

- External SATA cable
- For data transmission rates up to 300 MByte/s
- PIMF data lines + ground wires
- Over-all shield: foil and braid



RoHS
compliant

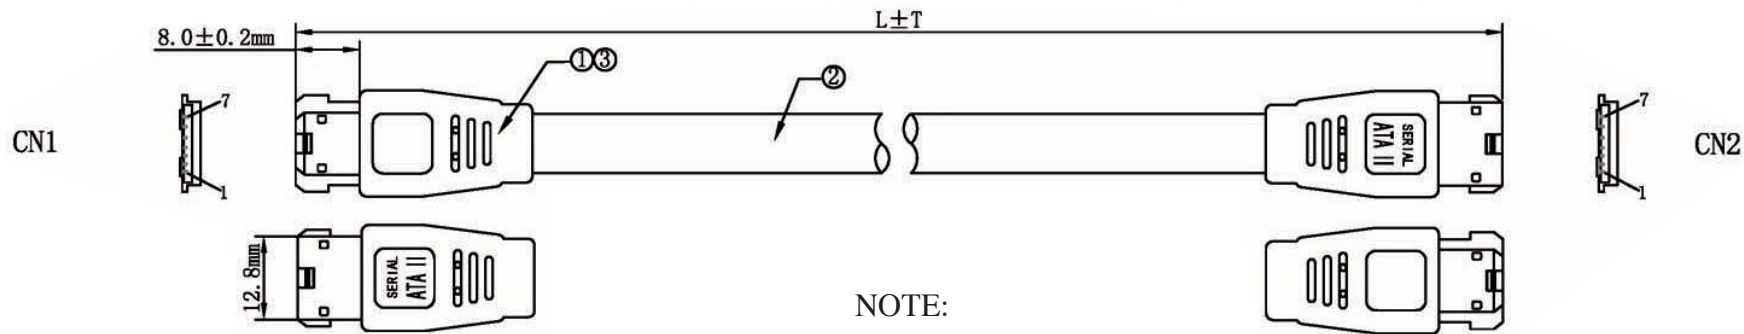

NOTE:


1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC 300V 10MΩ;
- (3). Contact resistance: 1ohm;
- (4). Dielectric strength: 150V AC/Sec, 1mA

2. RoHS Compliant

3. PRINT WORD: ECOLAN Serial ATA Cable 26AWG AWM Style 2725 80°C 30V VW-1

PIN OUT




SHELL SHELL

Specification



NO.	MATERIAL	DESCRIPTION	Q'TY
1	CONNECTOR	ESATA 7P/F, Gold Plated Pin	2
2	CABLE	ESATA (1/0.36BC*2C+A)*2+3E+J+AB, B=0.12mm/7*24 AL-MG Jacket: PVC/Black(BK01) OD: 4.5*9.0mm	1
3	OUTER MOULD	PVC 88A Colour: Black	2

ITEM NO.	LENGTH	EAN.CODE	ECOLAN Zip-Bag
ELM208006005	500±5mm	4049759001995	136mm*175mm
ELM208006010	1000±10mm	4049759002008	136mm*175mm
ELM208006020	2000±20mm	4049759002015	183mm*232mm

Poly Bag

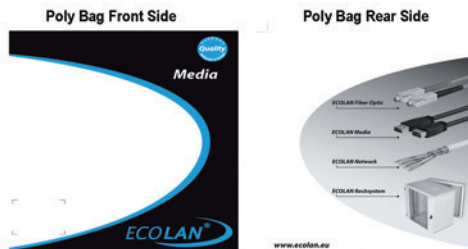

Label

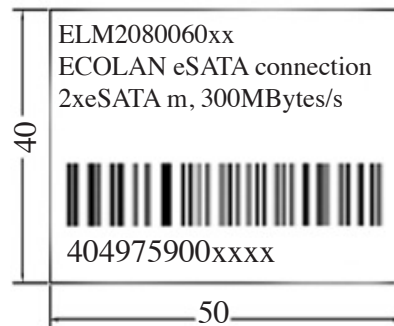

UP
The plugs of the cable have to show to upper side of the Poly bag!!!

RoHS compliant

Created BT	Date 08.04.10	ECOLAN eSATA connection, 2xeSATA m, 300MByte/s	
Last rev. BT	Date 08.04.10		
ITEM NO: ELM2080060xx			